





RAGNO SPIDER



R 300


www.lvmnacelle.com

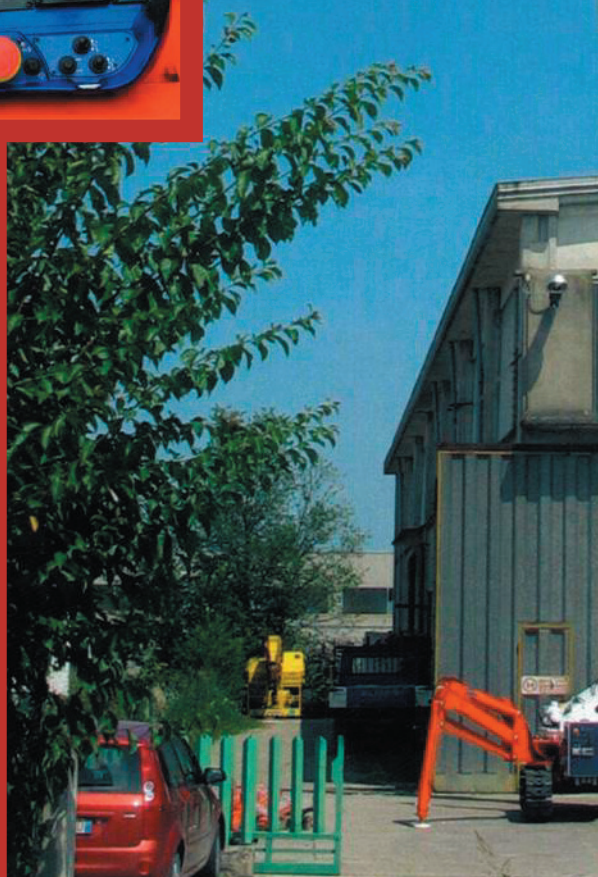

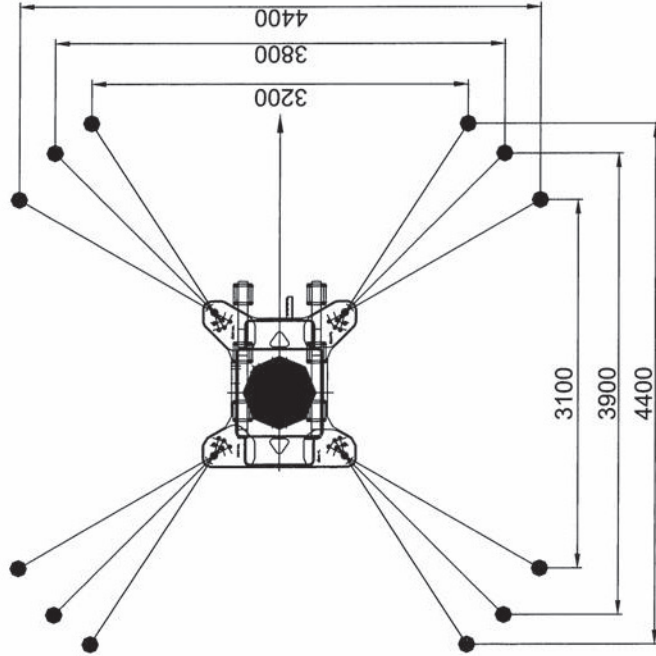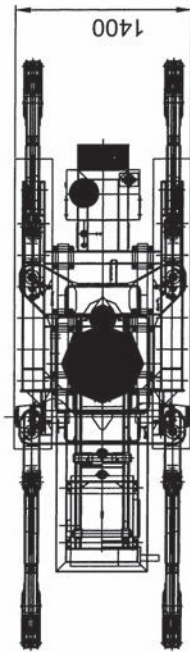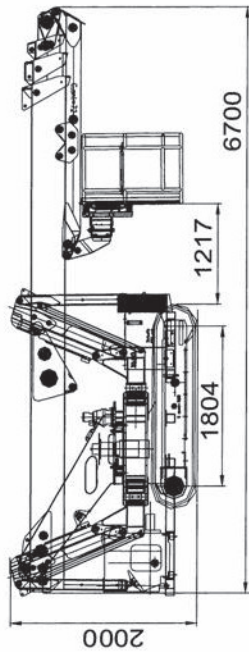

Dati e descrizioni sono forniti a titolo indicativo e non impegnativo
Data and descriptions are approximate and not binding
Toutes les données et descriptions sont fournies à titre indicatif,
sans engagement - Angaben und beschreibungen sind nicht verbindlich
Los datos y las descripciones son suministrados indicativamente
y sin compromiso.

I	-Altezza massima di lavoro	30.00 m
	-Sbraccio massimo di lavoro	14.5m
	-Rotazione torretta	360° non continui
	-Portata massima	200 kg
	-Movimenti idraulici proporzionali	
	-Massa totale	5800 kg
	-Pendenza superabile	30%
	-Dim. cestello	2,0 x 0,7 m
UK		
	-Max.working height	30.00 m
	-Max.working outreach	14.5 m
	-Turret rotation	360° not continuous
	-Max.capacity	200 kg
	-Proportional hydraulic controls	
	-Total weight	5800 kg
	-Gradeability	30%
	-Basket dimension	2,0 x 0,7 m
E		
	-Altura de trabajo	30.00 m
	-Alcance lateral m�x	14.5 m
	-Giro de la torre	360� no continua
	-Carga max en plataforma	200 Kg
	-Mandos proporcionales	
	-Peso total	5800 Kg
	-Pendiente m�x	30%
	-Dimensiones de plataforma	2,0 x 0,7 m
F		
	-Hauteur de travail	30.00 m
	-Depot max laterale	14.5 m
	-Rotation tourell	360� no continue
	-Max charge dans le panier	200 Kg
	-Commandes proportionnelles	
	-Poids total	5800 Kg
	-Max pente admissible	30%
	-Dimensions panier	2,0 x 0,7 m
D		
	-Max. Arbeitsh�he	30.00 m
	-Max. Arbeitsauslegung	14.5 m
	-Drehturm rotation	360� no endlos
	-Max. Tragkraft	200 Kg
	-Steuerungen hydraulische	
	-Gewicht	5800 Kg
	-Max. Steigf�higkeit	30%
	-Korbabmess.	2,0 x 0,7 m

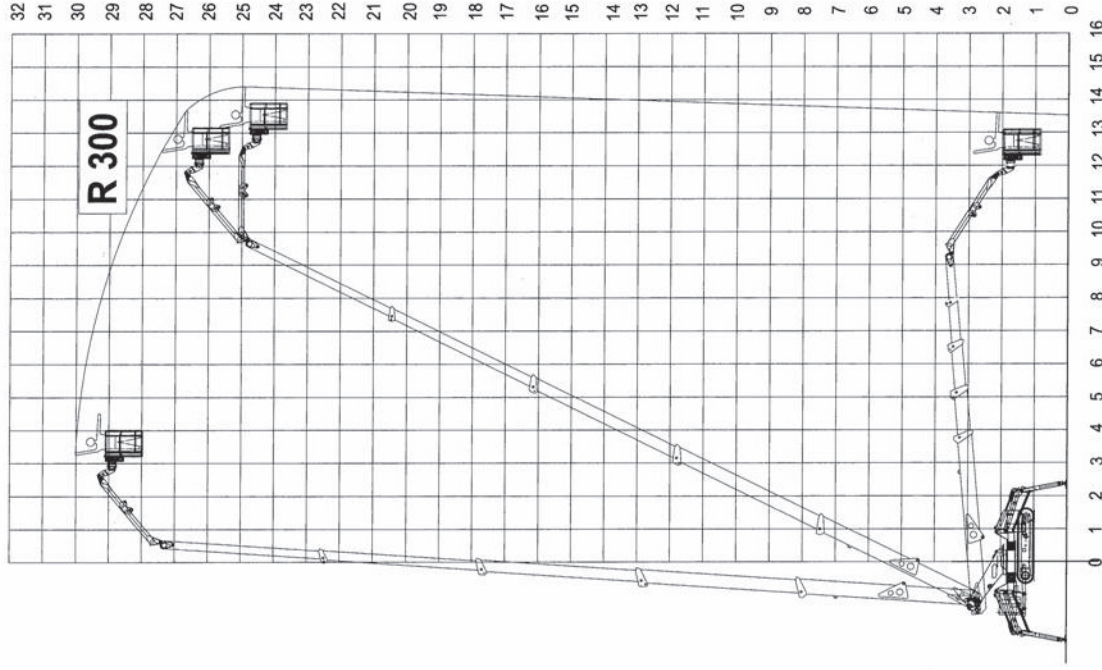

DISTRIBUTORE/DISTRIBUTOR